

ENI-PO1024/768/7 Control Panel


APPLICATION



The ENI-PO1024/768/7 control panel is intended for visualization of operating states, diagnostics and data archiving of any vehicle. The panel can cooperate with a superior controller or independently. Dedicated software is written for each application - almost any functionality can be implemented in accordance with the needs of the project. Thanks to this, subsequent operation and use are very easy and intuitive.

The operator panel is designed for internal installation in any place (e.g. on the driver's/engine driver's desk). Communication with other devices takes place via the CAN bus.

The operator panel allows you to download archived data using an ordinary USB mass storage device - "PenDrive", the downloaded data are read in the form of an openable file, e.g. using a Microsoft Excel spreadsheet. Information - both displayed on panel screen as well as archived in non-volatile memory are presented by means of switched screens.

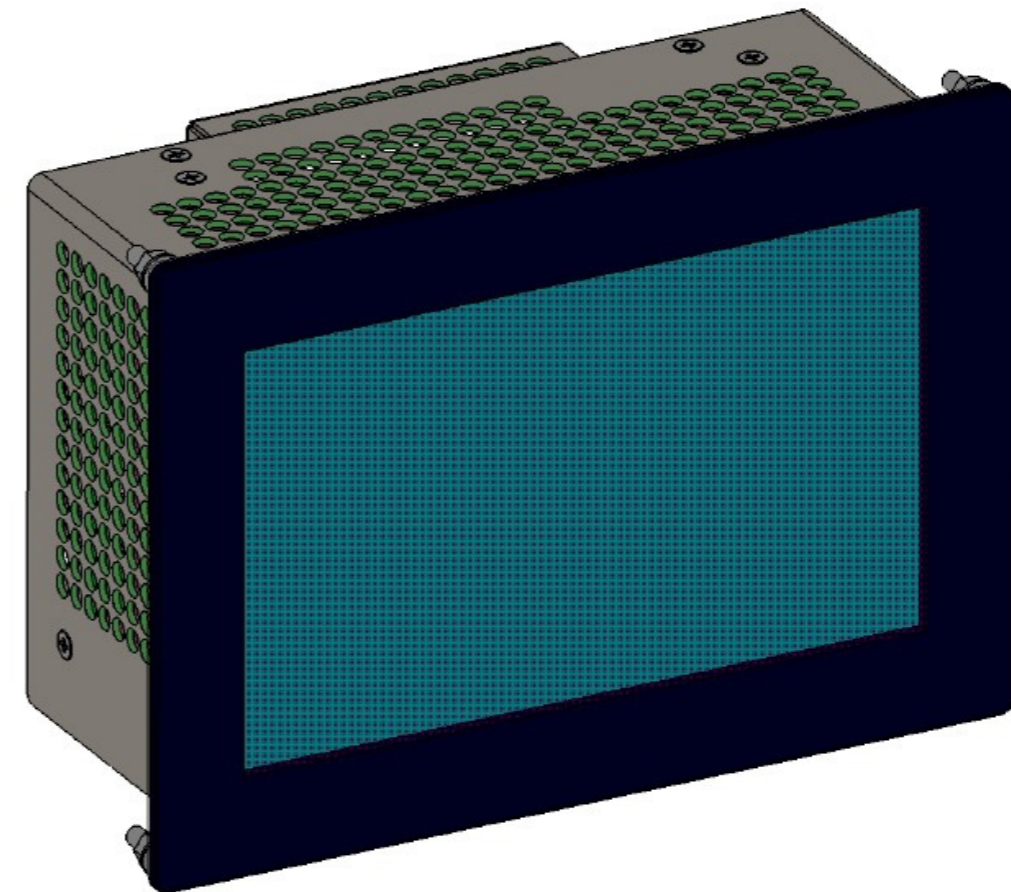

SPECIFICATION

TYPE	ENI-PO800/480/7
Rated input voltage	24 V _{DC} according with EN - 50155
Display	Type: TFT, 262k colours Size„7" Display resolution: 800 x 480 pikseli
Display resistance class	IK07 ²
Communication interface	- USB - CAN
Pollution degree	PD2 according with EN-50124-1 OV1 according with EN-50124-1
Overtoltage category	Natural / Forced (optional)
Cooling	Arbitrary
Working position	IP 20 according with EN-60529
Enclosure protection rating	-25°C ÷ 55°C (above 40°C % RH < 60)
Ambient operating temperature	-25°C ÷ 55°C
Storage temperature	1,8 kg
Weight	193 x 136 x 101 mm
Size (L x W x H)	